


TECHNICAL DATA

SERIES 6000 SSG CURTAIN WALL SYSTEM

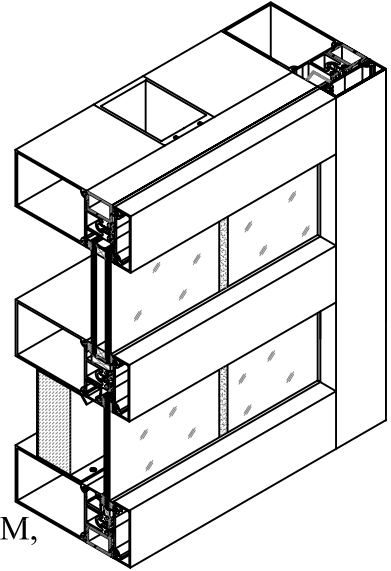

DESCRIPTION: 2-1/2" (63.5mm) WIDE, TWO SIDED, STRUCTURAL SILICONE GLAZED THERMALLY BROKEN WALL SYSTEM, WITH 2-7/8" (73.0mm), 3-5/8" (92.1mm), 5-1/4" (133.4mm) & 6-5/8" (168.3mm) MULLION BACK SECTIONS.

COMPATIBILITY: ADHESION TESTING OF SILICONE TO FINISHED SECTIONS IS RECOMMENDED BY THE SILICONE MANUFACTURERS.
DESIGNED TO SUIT ALL DOORS AND DOOR HARDWARE.

FINISH: PROFILES STOCKED IN MILL FINISH ONLY. OTHER FINISHES ARE AVAILABLE, SAMPLES UPON REQUEST.

STOCK LENGTH: 24'-2" (7.37 METERS).

ASSEMBLY: DESIGNED FOR SHEAR BLOCK ASSEMBLY.

STRENGTH: REFER TO WIND LOAD CHARTS FOR MAXIMUM ALLOWABLE SPANS.

ANCHORING: REFER TO FABRICATION AND INSTALLATION MANUAL.

GLAZING: 6000 SSG SERIES IS AN EXTERIOR GLAZED SYSTEM WHICH WILL ACCEPT 1/4" (6mm) SINGLE GLASS AND 1" (25mm) SILICONE SEALED UNIT.